


BVS 20-46 CATV amplifier 30 dB | 107 dB μ V CSO/CTB

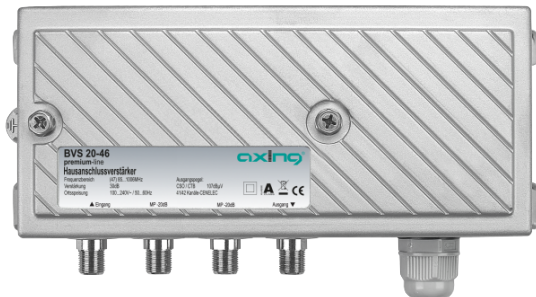

- ✓ Downstream 47/85...1006 MHz
- ✓ Attenuation and equalization adjustable PCB switches
- ✓ Interstage attenuation/equalization pluggable with jumpers
- ✓ Upstream via pluggable return path module 5...65 MHz (not included in delivery)
- ✓ Al-die-cast housing
- ✓ Test ports at in- and output

Order information


Type	BVS 20-46
Order no.	BVS02046
GTIN	7611682003444
PE	1
VE	1
EU customs tariff number	85437030



Technical data

EMC	according to EN 50083-2, class A
Downstream	
Frequency range	47*/85...1006 MHz
Gain	30 dB
Max. output level CSO/CTB (CENELEC raster, 41 channels, 60 dB IMA)	107 dB μ V
Attenuation: adjustable in 1 dB steps	0...15 dB
Equalization: adjustable in 1 dB steps	0...15 dB
Attenuation interstage: pluggable with jumpers	0 2 4 6 dB
Equalization interstage: pluggable with jumpers	0 2 4 6 dB
Return loss	\geq 18 dB (-1.5 dB/Octave)
Noise figure typ.	\leq 6.5 dB
RF connectors	
Type	F-female
Test port at in-/output	-20 \pm 2.5 dB/-20 \pm 1.0 dB
General	
Switching power supply	100...240 VAC / 50...60 Hz
Power indicator	LED
Power consumption	8 W
Equipotential bonding connection	4 mm ²
Operating temperature range (acc. to EN 60065)	-20...+50°C
Dimensions (W x H x D) appr.	195 x 90 x 55 mm
Weight	0.480 kg
IP code	IP54
Comments	* Without return path module

Example of use

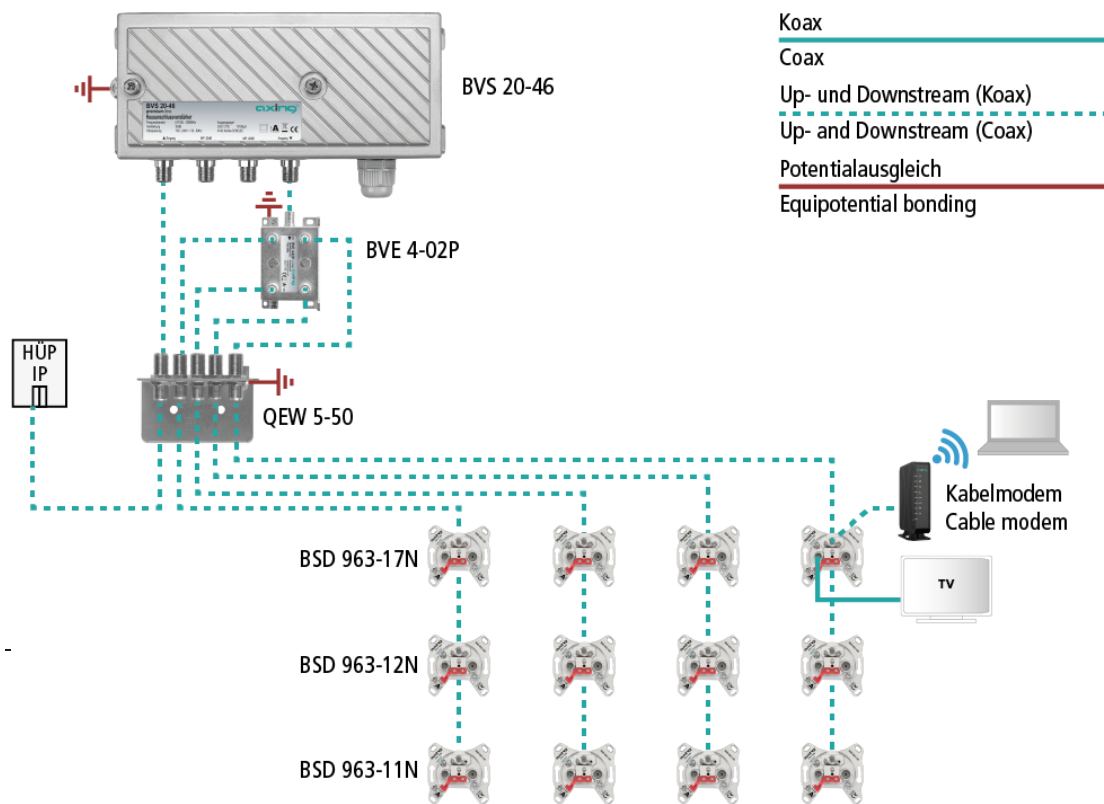

Suitable products

- [BZU 20-65 Return path module, active](#)
- [QEW 5-50 Earthing angle | 5-way, two-rowed](#)
- [QEW 6-50 Earthing angle | 6-way, two-rowed](#)
- [QEW 7-50 Earthing angle | 7-way, two-rowed](#)
- [QEW 8-50 Earthing angle | 8-way, two-rowed](#)
- [QEW 9-50 Earthing angle | 9-way, two-rowed](#)
- [QEW 11-50 Earthing angle | 11-way, two-rowed](#)
- [QEW 13-50 Earthing angle | 13-way, two-rowed](#)
- [QEW 17-50 Earthing angle | 17-way, two-rowed](#)
- [QEW 25-50 Earthing angle | 25-way, three-rowed](#)