


**SSD 5-18 SAT loop-through outlet 18 dB | 5...2200 MHz | CATV | SAT**

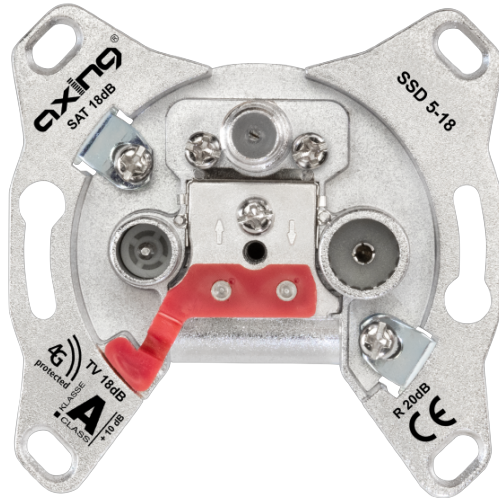

- ✓ Class A (+10 dB) according to EN 50083-2
- ✓ Suitable for return path 5...65 MHz
- ✓ Suitable for Unicable I (EN50494) and Unicable II (EN50607)
- ✓ Isolated with diodes
- ✓ Easy to install
- ✓ Stripping length 8/13 mm
- ✓ Extended F socket
- ✓ Surface treated

**Order information**

Type	SSD 5-18
Order no.	SSD00518
GTIN	7611682000948
PE	1
VE	1
EU customs tariff number	85291095



**Technical data**

Screening factor acc. to EN 50083-2	Class A (+ 10 dB)
Tap method	Filter circuit/directional coupler
Trunk line	
Frequency range input	5...2200 MHz
Through loss	≤ 1.3 dB @ 5...862 MHz ≤ 2.5 dB @ 862...2200 MHz
Frequency range output	5...2200 MHz
DC power pass	yes
Suitable cables (Inner conductor   outer diameter)	0.63...1.13 mm   4.70...7.35 mm
TV connector	
Connector type	IEC-male
Frequency range	109...862 MHz / 5...65 MHz
Tap loss	18 dB ±1.5 dB
Radio connector	
Connector type	IEC-female
Frequency range	87.5...125 MHz
Tap loss	22 dB ±2.0 dB
SAT connector	
Connector type	F female
Frequency range	950...2200 MHz
Tap loss	18 dB ±1.5 dB
DC power pass to trunk	yes
General	
Dimensions (W × H × D) appr.	68 × 68 × 39 mm
Weight	0.104 kg

**Suitable products**

- [SZU 2-00 Cover plate | TV/R/SAT | single piece](#)
- [TZU 1-00 Surface frame](#)
- [SZU 2-10 Cover plate | TV/R/SAT | two-parts](#)
- [TZU 1-10 Surface frame](#)
- [TZU 3-01 Terminating resistor, DC-isolated](#)